

FIG. 2

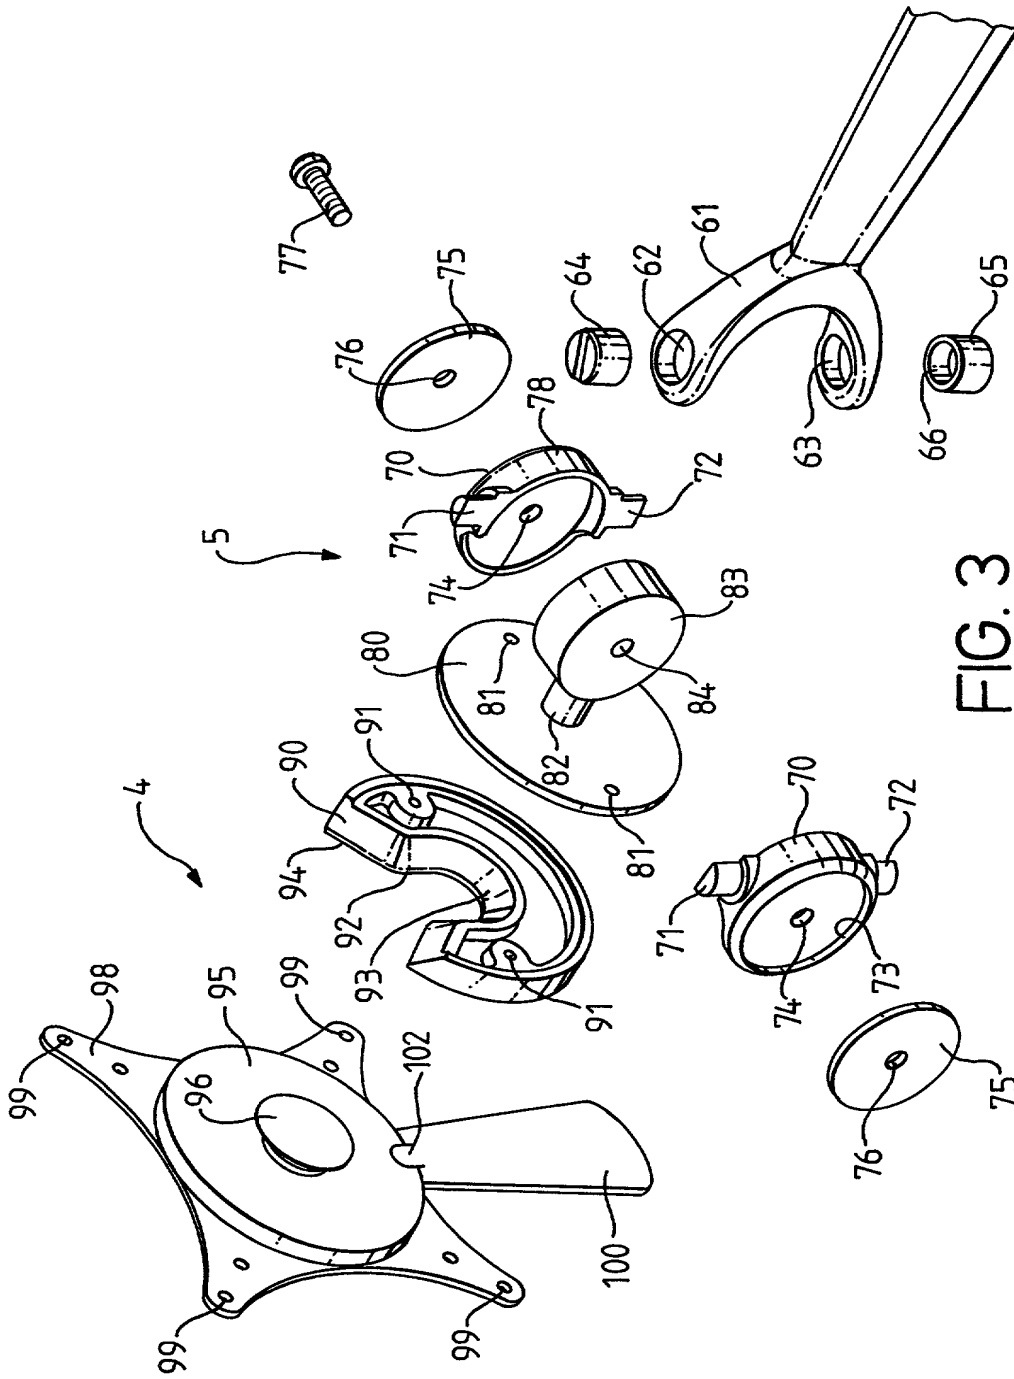


FIG. 3



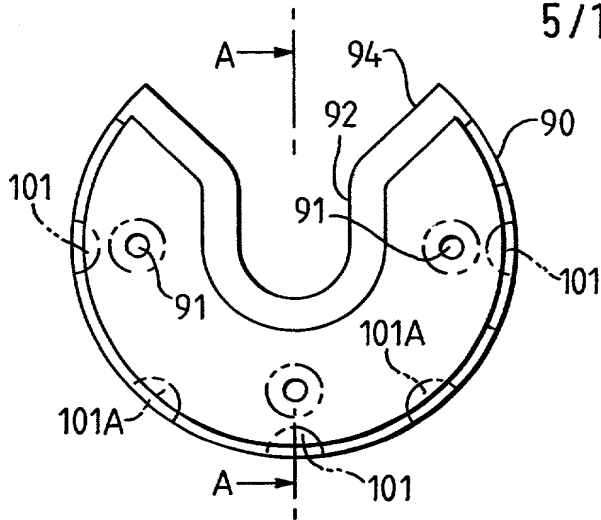


FIG. 5A

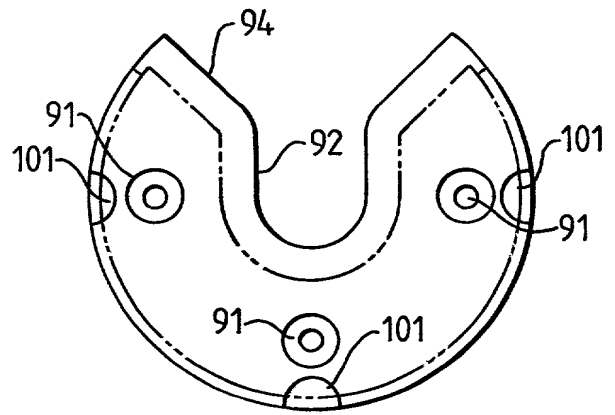


FIG. 5B

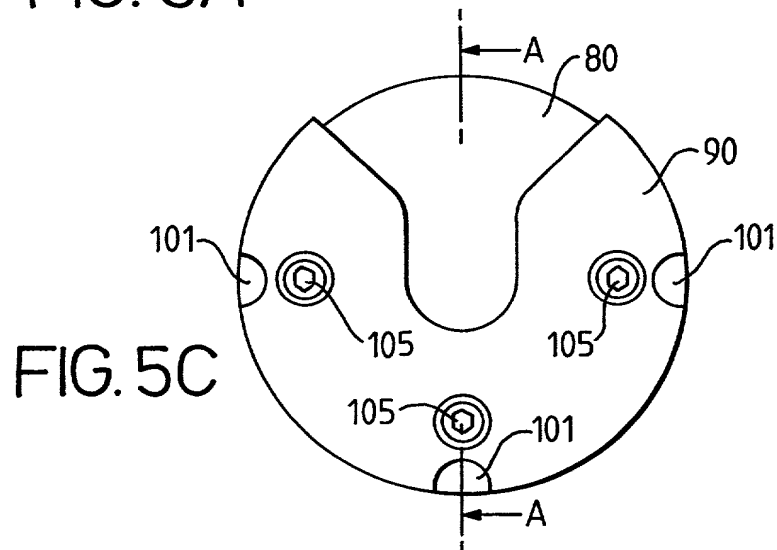


FIG. 5C

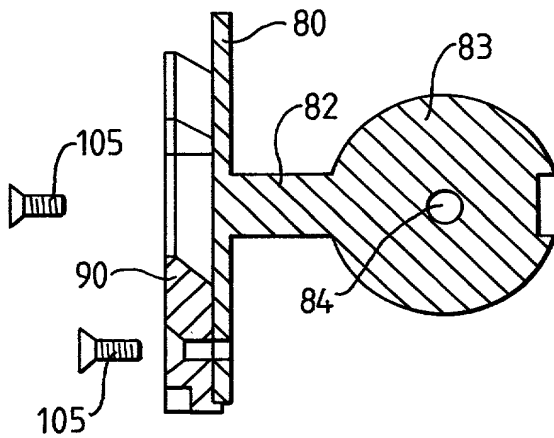


FIG. 5D

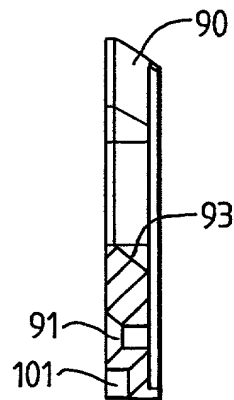


FIG. 6

FIG. 7A is a perspective view of a component 100, which is a cross-shaped member with a central hub 102 and four arms 98. The arms 98 are connected to the hub 102 by a central body 100. The arms 98 are provided with a series of holes 99 along their outer edges. The central hub 102 is provided with a central opening 101, which is surrounded by a flange 103. The flange 103 is provided with a series of holes 104, which are used for mounting the component 100 to a structure. The component 100 is shown in a perspective view, which highlights its three-dimensional shape and the arrangement of its features.

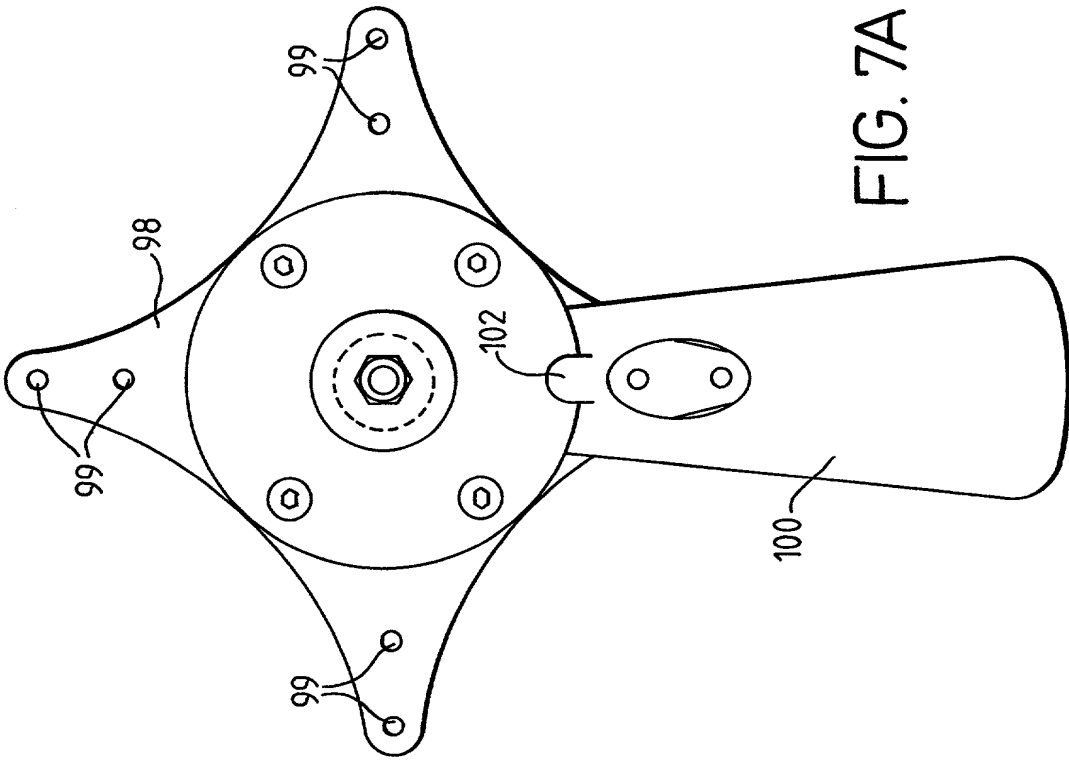


FIG. 7A

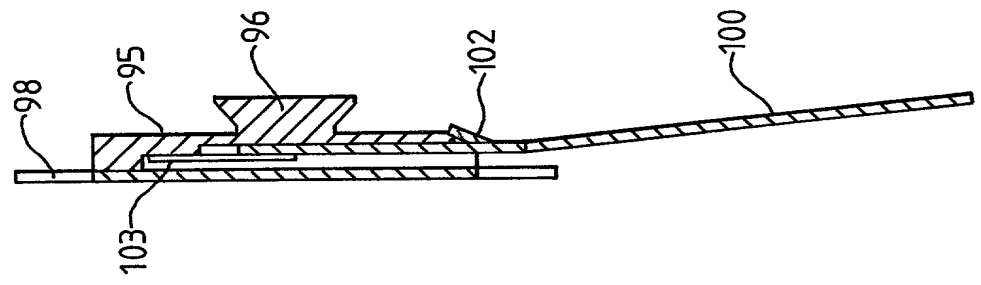


FIG. 7B

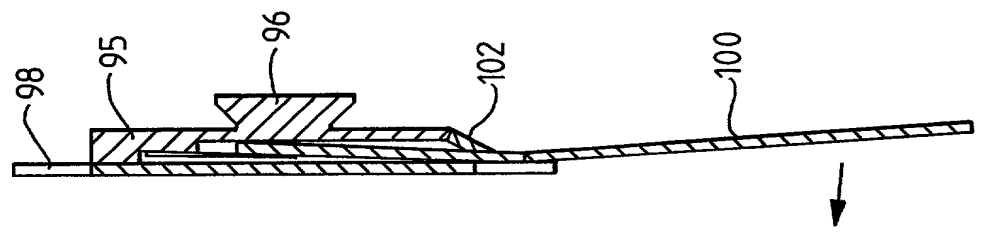


FIG. 7C

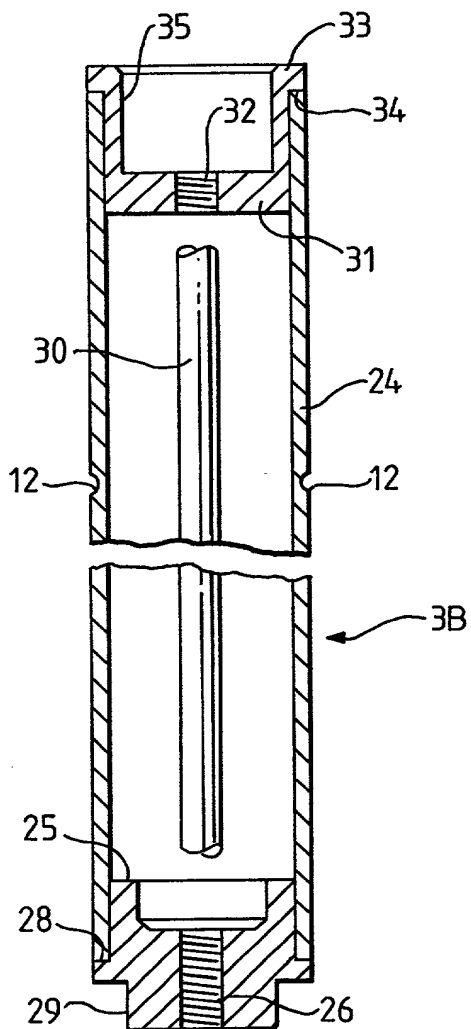


FIG. 8A

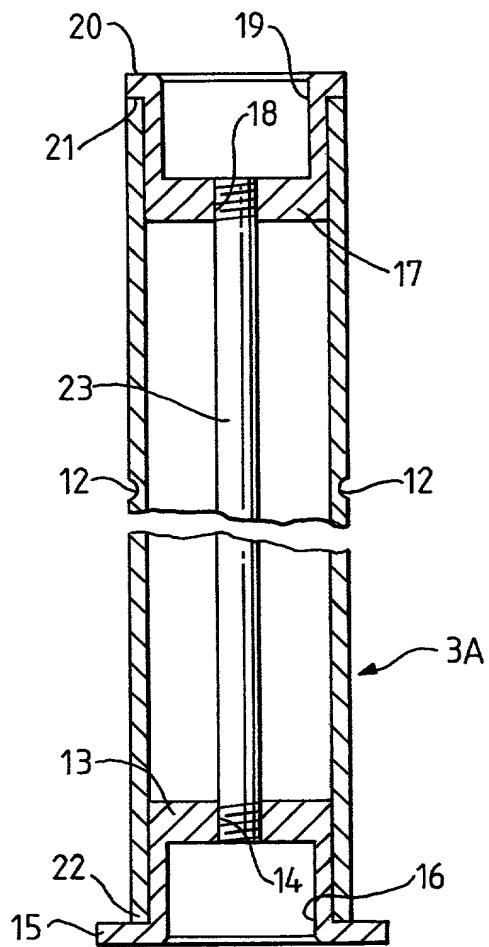


FIG. 8B

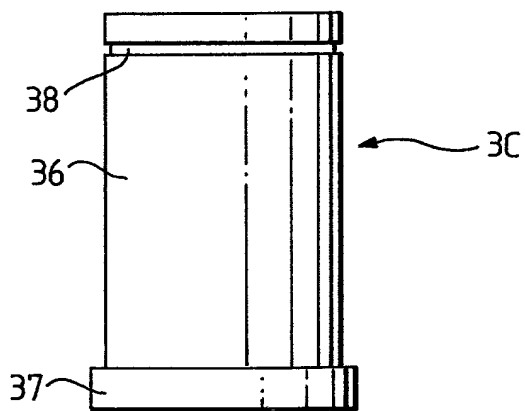


FIG. 9A

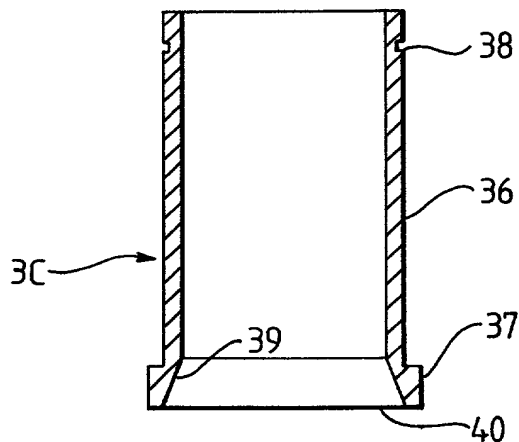
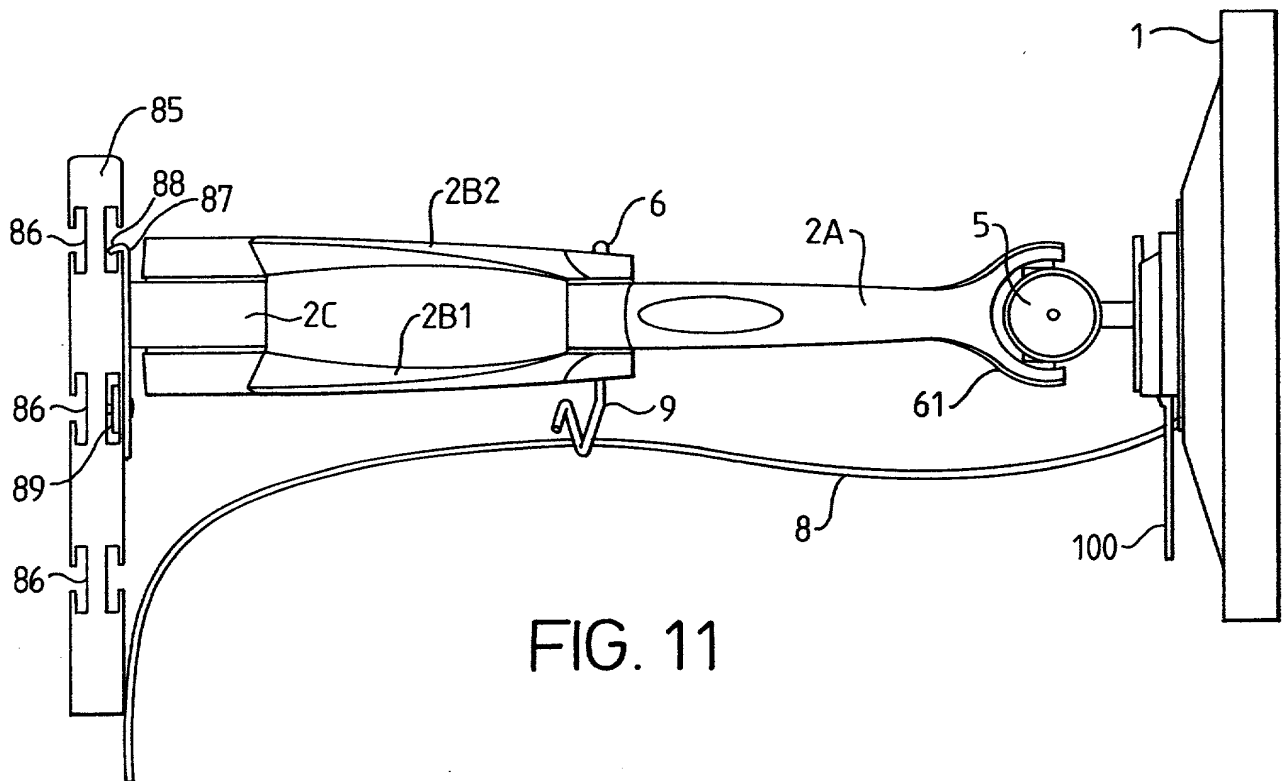
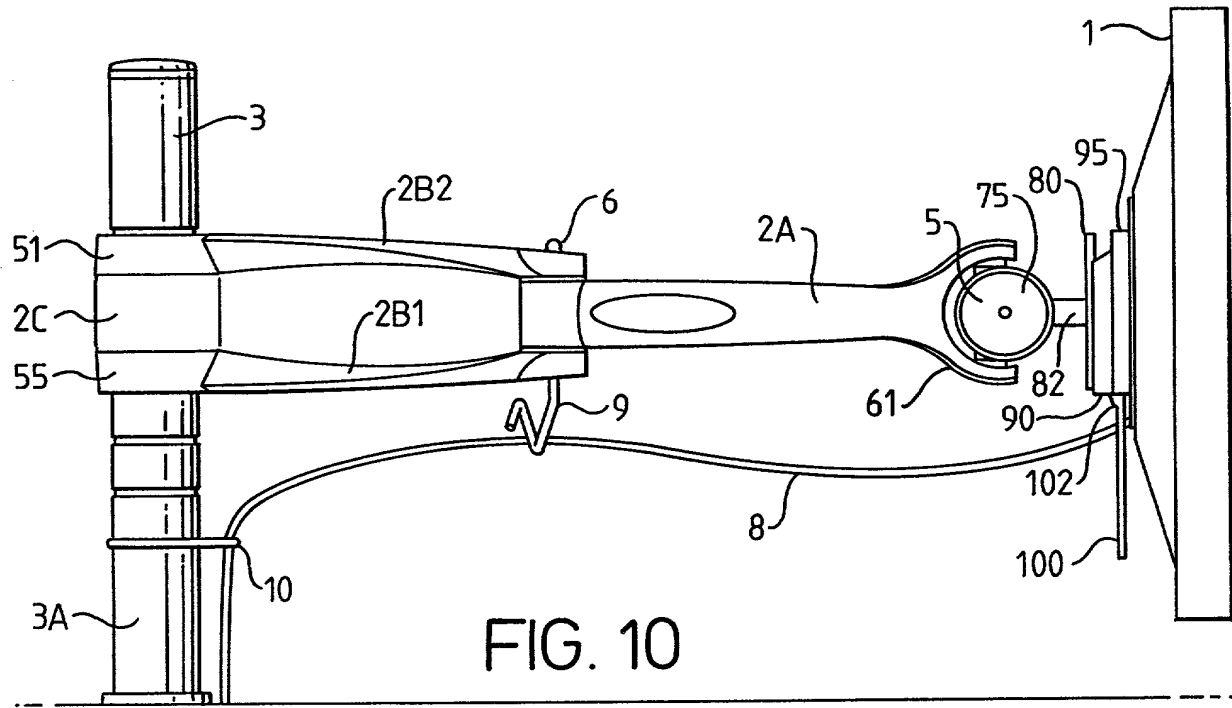
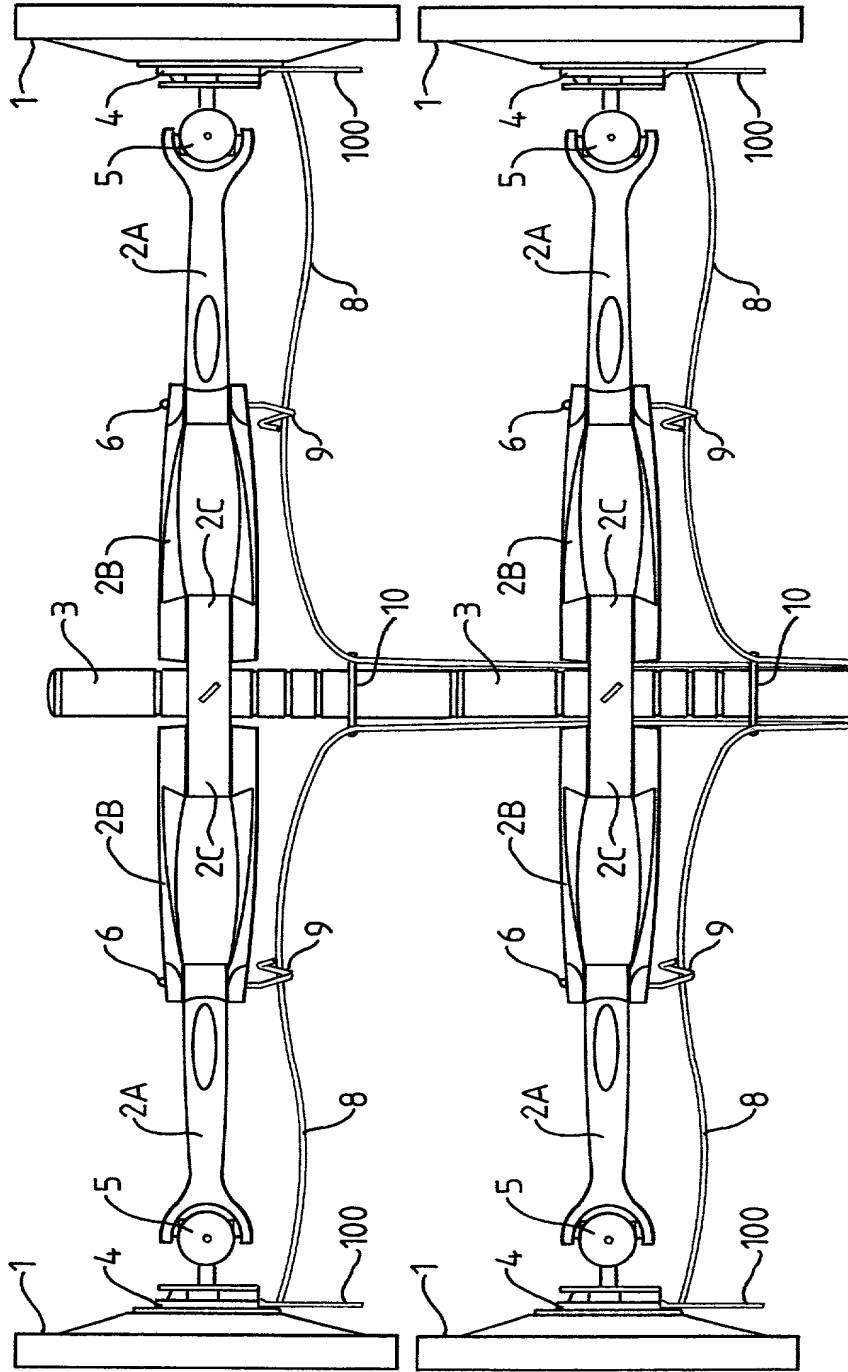


FIG. 9B







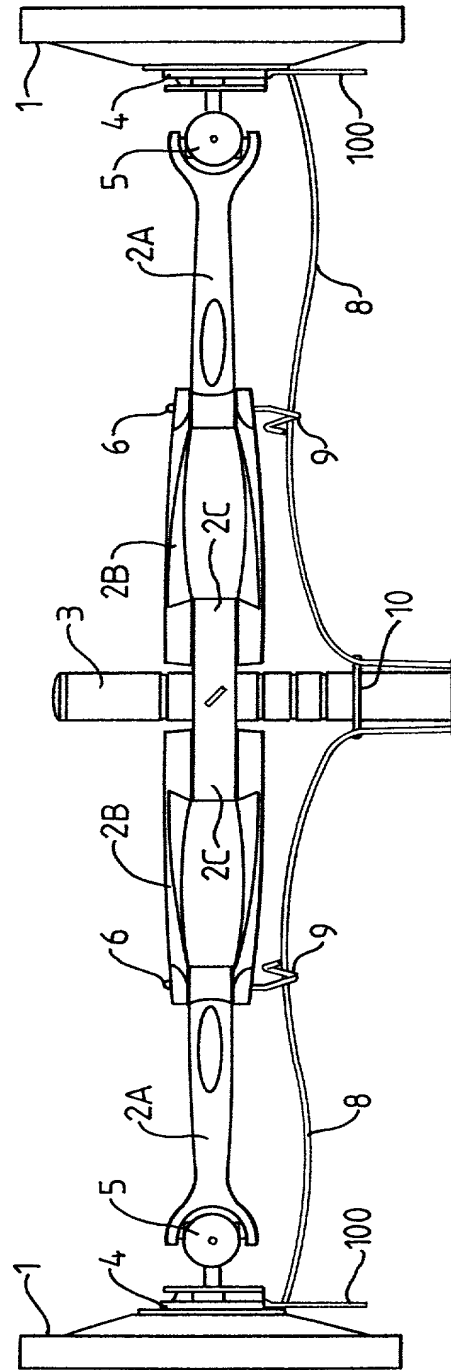


FIG. 13